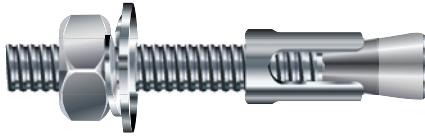


## JAM-UC Undercut Anchor


**Features:**

- High Loading Capacity
- Shallow Depth of Embedment
- Low expansion Force

**Material:**

- A2 stainless steel

**Base Material:**

- Granite

The data shown below is guide for preliminary design purpose. Note that natural granite properties vary. It is recommended that test are executed on project base to determine the capacities of JAM-UC Undercut Anchors for each particular application.

Item no	2010906057
Anchor Size	1/4"
Anchor Length	2-1/4"
Embed Depth	7/8"
Drill Bit	3/8"
Min. Granite Thickness	30mm
Edge Distance	50mm
Spacing of Two Anchors	100mm
Tightening Torque	15Nm
Ultimate load	10.5kN
Factor of Safety	3
Recommended load (Tensile)	3.5kN
Recommended load (Shear)	3kN

## SAFE AND RELIABLE ANCHORS FOR GRANITE

A Reliable, Fast and Economical anchorage system into granite panel is born now.

No more adhesives, No more limits on back anchors. The JAM-UC Undercut Anchor is a totally mechanical faster assembly that provides uncommonly high structural capacity for granite panel anchorage. The convenient drilling and setting method make your installation become safe and easy.